


Interactive Flat Panel (S9 Series)

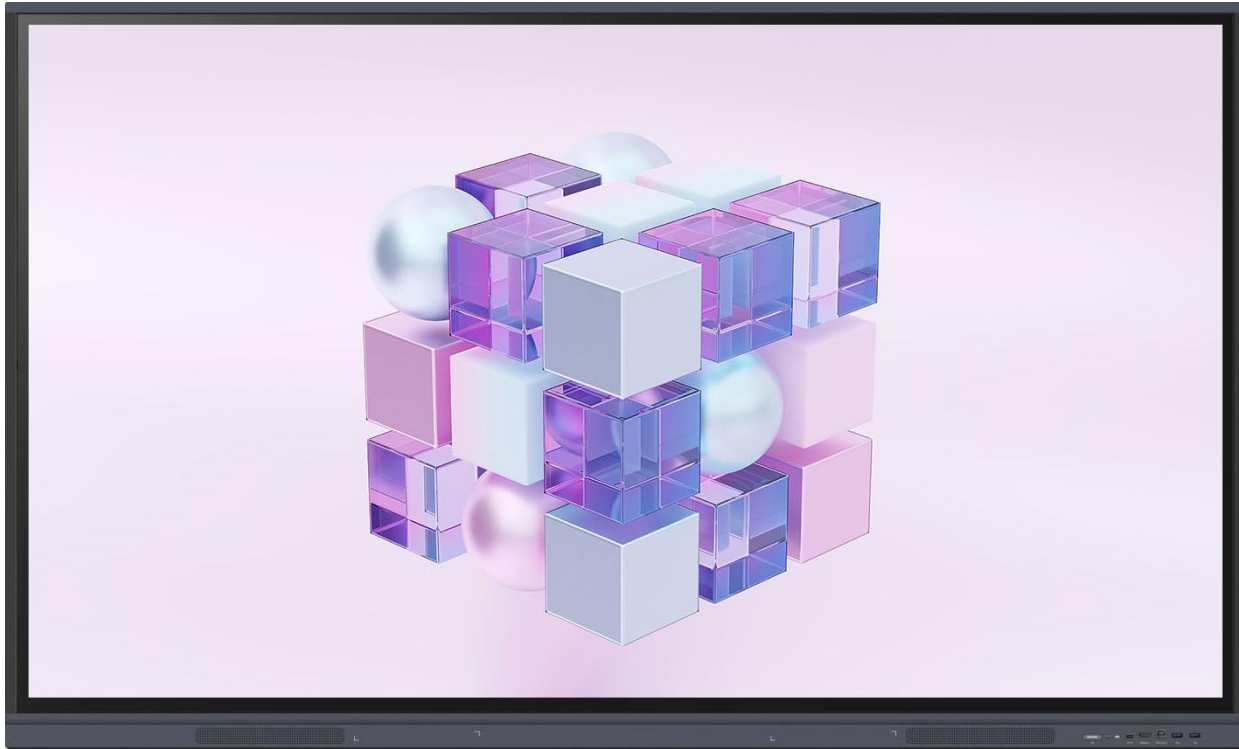

DSY-75S9

- Zero gap Bonding technology, low parallax writing and wider viewing angles
- 3mm anti-glare toughened glass with high haze OC for clearer display against ambient light interference
- Light-sensitive brightness adjustment and DC dimming support (de-flashing) for a more eye-protection display
- 4K Ultra HD display, support full channel 4K UI display
- Front USB3.0*2 + on-board USB3.0*2, supports switching with channels
- Support for Wireless projection
- ±1mm High precision infrared touch control for smooth writing
- Supports dual pens and dual colour displays for easy multi-person collaboration
- Wi-Fi6 support, dual-band 2.4G/5G, AP+STA operating mode
- Intelligent wake-up for HDMI/VGA/RS232 channels & network signal input in standby mode
- One network support, Android and OPS both on Gigabit network
- Support network sharing
- High level welcome application, enriching the live interactive experience with great fun
- Split screen, parallel tasks and wider scenes
- New floating menu mode for quick customization of features.
- Eye protection, lock screen, touch lock and other tools.

Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com

Product parameters

Panel	LCD Size		75"
	Type of Panel		ADS
	Respond Time		8ms
	Visual Ratio		16:9
	Max Visual Area		1649.664(H)×927.936(V)mm
	Resolution		3840 (H) ×2160 (V)
	Pixel pitch		0.4296×0.4296mm
	Frequency		60Hz
	Display Colors		1.07B (10bit)
	Color saturability		72%
	Contrast ration(Typ)		1200:1
	Viewing Angle		178°(H/V)
	Light source		DLED
	Brightness		350cd/m ²
	Life Span		≥30000 小时
Audio-video parameters	Speaker	Soundtrack	2.0
		Power	2×15W
Touch parameter	Touch specifications		Non-contact infrared sensing technology
	Support Systems		Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome
	Touch Points		40 Points Touch
	Min.Identifier		3mm
	Input mode		Opaque object (finger, pen, etc)
	Respond time		≤10ms
	Touch depth		±1.5mm
	Writing height		≤3mm
	Writing display		Single Stylus pen two-colour
	Output coordinates		32767 (W) ×32767(D)
System	System Version		Android 11.0
	CPU		Quad Core A55
	GPU		Mali G52MP2
	RAM		4GB
	ROM		32GB
Wireless	Bluetooth	Version	5.0
		Working	2.4GHz

Shenzhen DS Technology Co.,LTDWeb: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)Email: sales@newvideowall.com

		Frequency	
		Working Distance	0~10m
		Remark	Via the wireless module SI07B
	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B
I/O Interface	HDMI IN		3 (on board 2, front 1)
	HDMI OUT		1
	USB 2.0		1
	USB 3.0		4 (on board 2, front 2)
	TOUCH		2 (on board 1, front 1)
	VGA IN		1
	AUDIO IN		1
	AUDIO OUT		1
	SPDIF		1
	RS232		1
	TYPE-C		1(front)
	RJ45 OUT		1
	RJ45 IN		1
	Front small board interface		2*USB3.0+TYPE-C+TOUCH OUT+HDMI IN
Power	Voltage		100-240V ~ 50/60Hz 4A
	Max. power consumption		400W
	Standby power consumption		≤0.5W
Structure	Bare dimension		1709×1020×88mm
	Packing dimension		1860×220×1160mm
	Machine+wall mount thickness		118mm (WIB9060G)
	VESA hole site		800×400mm
	Wall mounting screw specifications		M8×25mm
	Net weight		47.30KGS
	Gross weight		TBD
Accessories	Power cord		×1
	Stylus pen		×2


Shenzhen DS Technology Co.,LTDWeb: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)Email: sales@newvideowall.com

	Wall mount	×1
	Operation manual	×1
Environment	Working temperature	0°C~40°C
	Working humidity	10%~90%RH
	Storage temperature	-20°C~60°C
	Storage humidity	10%~90%RH
	Working Elevation	<5000m
Standard module	WIFI module model	SI07B
Optional module	OPS model	OPS42A

Six product view

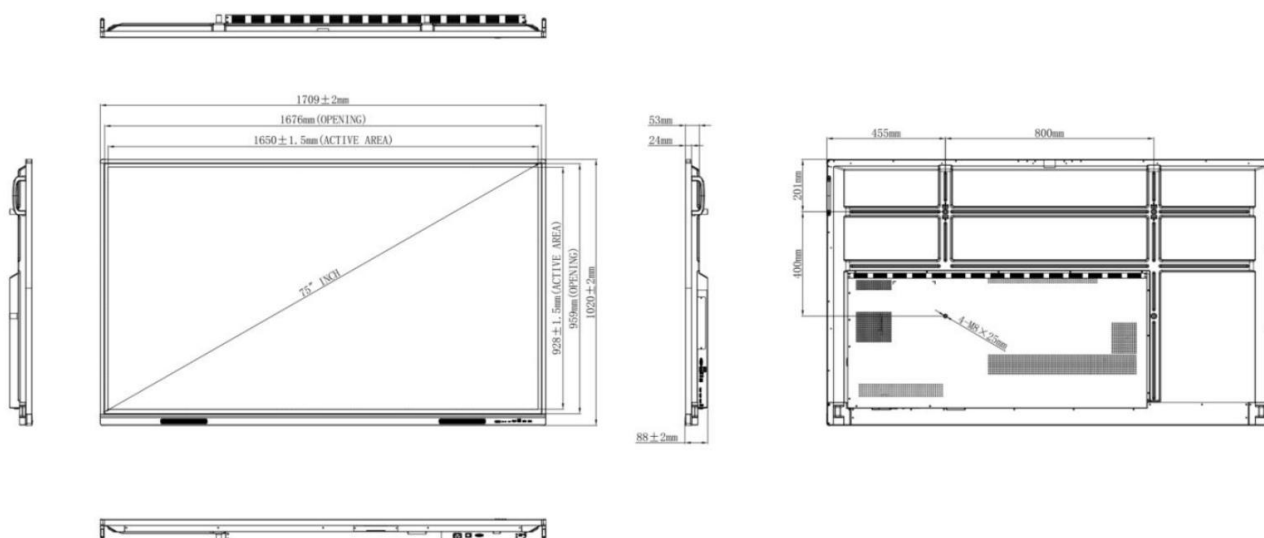

*Disclaimer

Due to product configuration and manufacturing process, actual body size/body weight may vary, please refer to the actual product.

The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, colour and size) may vary slightly.

Please refer to the actual product.

In order to provide accurate specifications as far as possible, the text expressions and pictures in this specification may be adjusted and revised in real time.

The product specification may be adjusted and revised in order to match the actual product performance and specifications.

In the event that such changes and adjustments are necessary, no special notice will be given.

Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com